



---

## 无法编辑UNIX安全模式卷的SACL

[https://kb-cn-stage.netapp.com/on-prem/ontap/da/NAS/NAS-KBs/Cannot\\_edit\\_SACLs\\_for\\_UNIX\\_secur...](https://kb-cn-stage.netapp.com/on-prem/ontap/da/NAS/NAS-KBs/Cannot_edit_SACLs_for_UNIX_secur...)

Updated: Wed, 22 Apr 2026 07:32:39 GMT

### 适用场景



- ONTAP 9
- 审核

### 问题描述

无论使用何种方法、卷上似乎都不允许使用SACL条目。

### Windows 资源管理器示例：

我们尝试将Active Directory用户"NAS用户"添加到名为"UNIX"的Unix模式安全卷中。为"NAS用户"创建权限后、单击"应用"。之后、我们可以看到已从权限条目中删除了"NAS用户"。

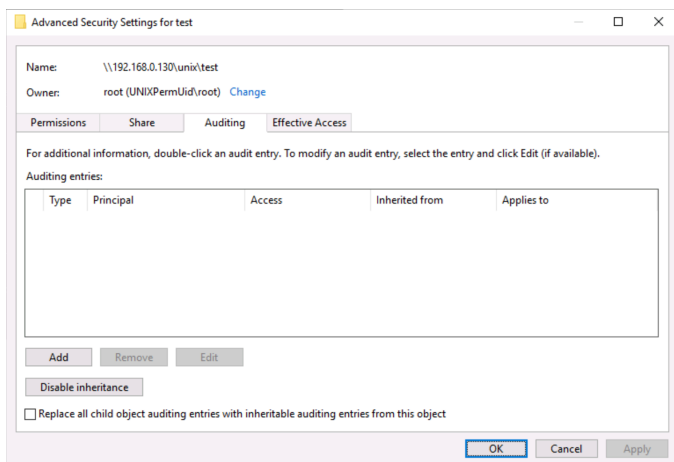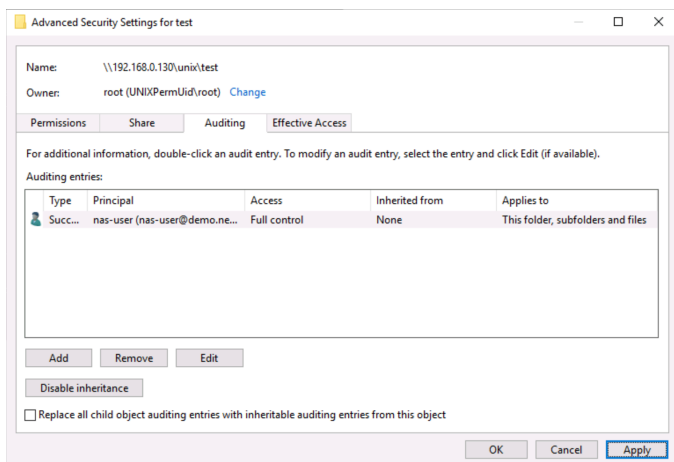

**ONTAP命令行界面示例：**

```
cluster1::vserver security file-directory> ntfs sacl show -vserver svm1_cluster1
-ntfs-sd unix-sd
Vserver: svm1_cluster1
NTFS Security Descriptor Name: unix-sd
```

| Account Name  | Access Type | Access Rights | Apply To                        |
|---------------|-------------|---------------|---------------------------------|
| -----         | -----       | -----         | -----                           |
| DEMO\nas-user | success     | full-control  | this-folder, sub-folders, files |

```
cluster1::vserver security file-directory> policy show -vserver svm1_cluster1
```

| Vserver       | Policy Name |
|---------------|-------------|
| -----         | -----       |
| svm1_cluster1 | unix_test   |

```
cluster1::vserver security file-directory> task add -policy-name unix_test -path  
/unix/test -vserver svm1_cluster1 -security-type ntfs -ntfs-sd unix-sd  
(vserver security file-directory policy task add)
```

**Error: command failed: Can't set ntfs security descriptor on a Unix File**